

## NUMERICAL STUDY OF CHEMICAL REACTION EFFECTS ON UNSTEADY MHD FLUID FLOW PAST AN INFINITE VERTICAL PLATE EMBEDDED IN A POROUS MEDIUM WITH VARIABLE SUCTION

MURALI G, AJIT PAUL, N.V.N BABU

**ABSTRACT.** A numerical study is presented on the effect of chemical reaction on an unsteady magneto hydrodynamic non-Newtonian fluid flow past an infinite vertical porous plate with variable suction. The governing dimensionless equations for this investigation are solved numerically by a finite element method. A parametric study illustrating the influence of different flow parameters on velocity and temperature are investigated. Numerical results are presented for various parameters. The present problem has significant applications in chemical engineering materials processing, solar porous wafer absorber systems and metallurgy.

### 1. INTRODUCTION

The effect of chemical reaction on an unsteady magnetohydrodynamic non-Newtonian fluid flow past an infinite vertical porous plate with variable suction and heat convective mass transfer, where the plate temperature oscillates with the same frequency as that of variable suction velocity. The flow phenomenon has been characterized with the help of flow parameters such as velocity, temperature and concentration profiles for different parameters such as thermal Grashof number (Grashof number for heat transfer), solutal Grashof number (Grashof number for mass transfer), Prandtl number, Schmidt number, Hartmann number, Permeability parameter and Chemical reaction parameter. The velocity, temperature and concentration profiles are shown through graphically and Skin-friction, Nusselt number and Schmidt number are shown through tabular forms. The present problem has significant applications in chemical engineering materials processing, solar porous wafer absorber systems and metallurgy. Combined heat and mass transfer problems with chemical reaction are of importance in many processes and have, therefore, received a considerable amount of attention in recent years. In processes such as drying, evaporation at the surface of a water body, energy transfer in a wet cooling tower and the flow in a desert cooler, heat and mass transfer occur

---

*Key words and phrases.* Chemical reaction, Unsteady, MHD, non-Newtonian fluid flow, Infinite vertical plate, Porous medium, finite element method.

Submitted July 15, 2014.

simultaneously. Possible applications of this type of flow can be found in many industries. For example, in the power industry, among the methods of generating electric power is one in which electrical energy is extracted directly from a moving conducting fluid. Many practical diffusive operations involve the molecular diffusion of a species in the presence of chemical reaction within or at the boundary. There are two types of reactions, homogeneous reaction and heterogeneous reaction. A homogeneous reaction is one that occurs uniformly throughout a given phase. The species generation in a homogeneous reaction is analogous to internal source of heat generation. In contrast, a heterogeneous reaction takes place in a restricted region or within the boundary of a phase. It can therefore be treated as a boundary condition similar to the constant heat flux condition in heat transfer. The study of heat and mass transfer with chemical reaction is of great practical importance to engineers and scientists because of its almost universal occurrence in many branches of science and engineering. The flow of a fluid past a wedge is of fundamental importance since this type of flow constitutes a general and wide class of flows in which the free stream velocity is proportional to a power of the length coordinate measured from the stagnation point. In many transport processes in nature and in industrial applications in which heat and mass transfer is a consequence of buoyancy effects caused by diffusion of heat and chemical species. The study of such processes is useful for improving a number of chemical technologies, such as polymer production and food processing. In nature, the presence of pure air or water is impossible. Some foreign mass may be present either naturally or mixed with the air or water. The present trend in the field of chemical reaction with viscosity analysis is to give a mathematical model for the system to predict the reactor performance. A large amount of research work has been reported in this field. In particular, the study of chemical reaction, heat and mass transfer is of considerable importance in chemical and hydrometallurgical industries. Chemical reaction can be codified as either heterogeneous or homogeneous processes. This depends on whether they occur at an interface or as a single phase volume reaction.

Both free and forced convection boundary layer flows with Soret and Dufour have been addressed by Abreu et al. [1]. Afify [2] carried out an analysis to study free convective heat and mass transfer of an incompressible, electrically conducting fluid over a stretching sheet in the presence of suction and injection with thermal diffusion and diffusion thermo effects. Beg et al. [4] have also analyzed the chemical reaction rate effects on steady buoyancy driven dissipative micropolar free convective heat and mass transfer in a Darcian porous regime. Beg et al. [5] have also studied numerically both viscous heating and Joule (Ohmic) dissipation effects on transient Hartmann-Couette convective flow in a Darcian porous medium channel also including Hall current and ion-slip effects. Chaudhary et al. [6] studied the effect of free convection effects on magnetohydrodynamic flow past an infinite vertical accelerated plate embedded in porous media with constant heat flux by using Laplace transform technique for finding the analytical solutions. Chin et al. [7] obtained numerical results for the steady mixed convection boundary layer flow over a vertical impermeable surface embedded in a porous medium when the viscosity of the fluid varies inversely as a linear function of the temperature. Das and Mitra [8] discussed the unsteady mixed convective MHD flow and mass transfer past an accelerated infinite vertical plate with suction. Recently, Das and his co-workers [9]

analyzed the effect of mass transfer on MHD flow and heat transfer past a vertical porous plate through a porous medium under oscillatory suction and heat source. Das et al. [10] investigated numerically the unsteady free convective MHD flow past an accelerated vertical plate with suction and heat flux. Das and his associates [11] estimated the mass transfer effects on unsteady flow past an accelerated vertical porous plate with suction employing finite difference analysis. Gireesh kumar et al. [12] investigated effects of chemical reaction and mass transfer on MHD unsteady free convection flow past an infinite vertical plate with constant suction and heat sink.

Hayat et al. [13] analyzed a mathematical model in order to study the heat and mass transfer characteristics in mixed convection boundary layer flow about a linearly stretching vertical surface in a porous medium filled with a visco-elastic fluid, by taking into account the diffusion thermo and thermal diffusion effects. Ibrahim et al. [14] studied the effects of chemical reaction and radiation absorption on transient hydromagnetic natural convection flow with wall transpiration and heat source. The unsteady free convective MHD flow with heat transfer past a semi-infinite vertical porous moving plate with variable suction has been studied by Kim [15]. Effects of chemical reaction on free convection flow of a polar fluid through a porous medium in the presence of internal heat generation are examined by Patil and Kulkarni [16]. Several studies have also described thermal radiation effects on convection flows in porous media. MHD convective flow of a micropolar fluid past a continuously moving vertical porous plate in the presence of heat generation/absorption was studied by Rahman and Sattar [17]. Sarangi and Jose [19] studied the unsteady free convective MHD flow and mass transfer past a vertical porous plate with variable temperature. The effect of temperature dependent viscosity and thermal conductivity on unsteady MHD convective heat transfer past a semi-infinite vertical porous plate has studied Seddek and Salama [20]. Seddeek et al. [21] more recently reported on the effect of chemical reaction and variable viscosity on hydromagnetic mixed convection heat and mass transfer for Hiemenz flow through a Darcian porous media in the presence of radiation and magnetic field. Seethamahalakshmi et al. [22] discussed the effects of Soret on an unsteady magnetohydrodynamic free convection flow past an infinite vertical porous plate with variable suction. The unsteady free convection flow of a viscous incompressible fluid past an infinite vertical plate with constant heat flux is considered on taking into account viscous dissipative heat, under the influence of a transverse magnetic field studied by Srihari et al [23]. Sivaiah and Srinivasa Raju [24] investigated the effect of heat and mass transfer on the unsteady magnetohydrodynamic free convective flow with Hall current, heat source, and viscous dissipation.

The object of the present paper is to analyze the chemical reaction effect on an unsteady magnetohydrodynamic non-Newtonian fluid flow past an infinite vertical plate by taking variable suction into account. The governing equations are transformed by using unsteady similarity transformation and the resultant dimensionless equations are solved by using the finite element method. The effects of various governing parameters on the velocity, temperature, concentration, skin-friction coefficient, Nusselt number and Sherwood number are shown in figures and tables and discussed in detail. From computational point of view it is identified

and proved beyond all doubts that the finite element method is more economical in arriving at the solution and the results obtained are good agreement with the results of Seethamahalakshmi et al. [22] in some special cases.

## 2. MATHEMATICAL FORMULATION

Consider the unsteady magnetohydrodynamic non-Newtonian fluid flow past an infinite vertical porous plate with variable suction and heat convective mass transfer, where the plate temperature oscillates with the same frequency as that of variable suction velocity in presence of chemical reaction. We made the following assumptions.

- (1) In Cartesian coordinate system, let  $x'$ -axis is taken to be along the plate and the  $y'$ -axis normal to the plate. Since the plate is considered infinite in  $x'$ -direction, hence all physical quantities will be independent of  $x'$ -direction.
- (2) The wall is maintained at constant temperature ( $T'_w$ ) and concentration ( $C'_w$ ) higher than the ambient temperature ( $T'_\infty$ ) and concentration ( $C'_\infty$ ) respectively.
- (3) Let the components of velocity along  $x'$  and  $y'$  axes be  $u'$  and  $v'$  which are chosen in the upward direction along the plate and normal to the plate respectively.
- (4) A uniform magnetic field of magnitude  $B_o$  is applied normal to the plate. The transverse applied magnetic field and magnetic Reynold's number are assumed to be very small, so that the induced magnetic field is negligible.
- (5) The polarization effects are assumed to be negligible and hence the electric field is also negligible.
- (6) The homogeneous chemical reaction of first order with rate constant between the diffusing species and the fluid is assumed.
- (7) The concentration of the diffusing species in the binary mixture is assumed to be very small in comparison with the other chemical species, which are present and hence Soret and Dufour effects are negligible.
- (8) The Hall Effect of magnetohydrodynamics and magnetic dissipation (Joule heating of the fluid) are neglected.

Hence the governing equations of the problem are:

$$\frac{\partial \rho'}{\partial t'} + \frac{\partial(\rho' u')}{\partial x'} + \frac{\partial(\rho' v')}{\partial y'} = 0 \quad (1)$$

$$\begin{aligned} \rho' \left( \frac{\partial u'}{\partial t'} + u' \frac{\partial u'}{\partial x'} + v' \frac{\partial u'}{\partial y'} \right) &= - \frac{\partial \rho'}{\partial x'} + \rho' g \beta (T' - T'_\infty) + \rho' g \beta^* (C' - C'_\infty) \\ &+ \frac{\partial}{\partial x'} \left( 2\mu \frac{\partial u'}{\partial x'} \right) + \frac{\partial}{\partial y'} \left\{ \mu \left( \frac{\partial u'}{\partial y'} + \frac{\partial v'}{\partial x'} \right) \right\} \\ &- \frac{\mu}{K'} u' - \sigma B_o^2 u' \end{aligned} \quad (2)$$

$$\rho' C'_p \left( \frac{\partial T'}{\partial t'} + u' \frac{\partial T'}{\partial x'} + v' \frac{\partial T'}{\partial y'} \right) = K_T \left( \frac{\partial^2 T'}{\partial x'^2} + \frac{\partial^2 T'}{\partial y'^2} \right) \quad (3)$$

$$\rho' \left( \frac{\partial C'}{\partial t'} + u' \frac{\partial C'}{\partial x'} + v' \frac{\partial C'}{\partial y'} \right) = \rho' D \left( \frac{\partial^2 C'}{\partial x'^2} + \frac{\partial^2 C'}{\partial y'^2} \right) - K_r (C' - C'_\infty) \quad (4)$$

Here, the status of an equation of state is that of equation  $\rho' = \text{constant}$ . This means that the density variations produced by the pressure, temperature and concentration variations are sufficiently small to be unimportant. Variations of all fluid properties other than the variations of density except in so far as they give rise to a body force, are ignored completely (Boussinesq's approximation). All the physical variables are functions of  $y'$  and  $x'$  only as the plate are infinite. It is also assumed that the variation of expansion coefficient is negligibly small and the pressure and influence of the pressure on the density are negligible. Within the framework of above assumptions the governing equations reduce to

Continuity Equation:

$$\frac{\partial v'}{\partial y'} = 0 \quad (5)$$

Momentum Equation:

$$\frac{\partial u'}{\partial t'} + v' \frac{\partial u'}{\partial y'} = g\beta(T' - T'_\infty) + g\beta^*(C' - C'_\infty) + v \frac{\partial^2 u'}{\partial y'^2} - \left( \frac{\sigma B_o^2}{\rho} + \frac{v}{K'} \right) u' \quad (6)$$

Energy Equation:

$$\frac{\partial T'}{\partial t'} + v' \frac{\partial T'}{\partial y'} = \frac{K_T}{\rho' C_p} \frac{\partial^2 T'}{\partial y'^2} \quad (7)$$

Species Diffusion Equation:

$$\frac{\partial C'}{\partial t'} + v' \frac{\partial C'}{\partial y'} = D \frac{\partial^2 C'}{\partial y'^2} - K_r(C' - C'_\infty) \quad (8)$$

And the corresponding boundary conditions are

$$\left. \begin{aligned} t' \leq 0 : u' = 0, T' = T'_\infty, C' = C'_\infty \text{ for all } y', \\ t' > 0 : \begin{cases} u' = 0, T' = T'_w = 1 + \varepsilon e^{i\omega' t'}, C' = C'_w \text{ at } y' = 0, \\ u' \rightarrow 0, T' \rightarrow T'_\infty, C' \rightarrow C'_\infty \text{ as } y' \rightarrow \infty. \end{cases} \end{aligned} \right\} \quad (9)$$

From the continuity equation, it can be seen that  $v'$  is either a constant or a function of time. So, assuming suction velocity to be oscillatory about a non-zero constant mean, one can write

$$v' = -v_0(1 + \varepsilon A e^{i\omega' t'}) \quad (10)$$

Where  $\varepsilon$ ,  $A$  are small such that  $\varepsilon A \ll 1$ . The negative sign indicates that the suction velocity is directed towards the plate. In order to write the governing equations and the boundary conditions in dimensional following non-dimensional quantities are introduced.

$$\left. \begin{aligned} y = \frac{y' v_0}{v}, t = \frac{t' v_0}{v}, u = \frac{u'}{v_0}, v = \frac{v'}{v_0}, \theta = \frac{T' - T'_\infty}{T'_w - T'_\infty}, C = \frac{C' - C'_\infty}{C'_w - C'_\infty}, Gr = \frac{g\beta v (T'_w - T'_\infty)}{v_0^3}, Sc = \frac{v}{D}, \\ Gc = \frac{g\beta^* v (C'_w - C'_\infty)}{v_0^3}, Pr = \frac{\mu C_p}{K_T}, M = \left( \frac{\sigma B_o^2}{\rho} \right) \frac{v}{v_0^2}, K = \frac{K' v_0^2}{v^2}, k_r = \frac{K_r v}{v_0^2}, \omega = \frac{4v\omega'}{v_0'^2} \end{aligned} \right\} \quad (11)$$

Hence using the above non-dimensional quantities, the equations (6)-(9) in the non-dimensional form can be written as

$$\frac{1}{4} \frac{\partial u}{\partial t} - (1 + \varepsilon A e^{i\omega t}) \frac{\partial u}{\partial y} = \frac{\partial^2 u}{\partial y^2} + (Gr)\theta + (Gc)C - \left( M + \frac{1}{K} \right) u \quad (12)$$

$$\frac{1}{4} \frac{\partial \theta}{\partial t} - (1 + \varepsilon A e^{i\omega t}) \frac{\partial \theta}{\partial y} = \frac{1}{Pr} \frac{\partial^2 \theta}{\partial y^2} \quad (13)$$

$$\frac{1}{4} \frac{\partial C}{\partial t} - (1 + \varepsilon A e^{i\omega t}) \frac{\partial C}{\partial y} = \frac{1}{Sc} \frac{\partial^2 C}{\partial y^2} - K_r C \quad (14)$$

And the corresponding boundary conditions are

$$\left. \begin{array}{l} t \leq 0 : u = 0, \theta = 0, C = 0 \text{ for all } y, \\ t > 0 : \left\{ \begin{array}{l} u = 0, \theta = 1 + \varepsilon e^{i\omega t}, C = 1 \text{ at } y = 0, \\ u \rightarrow 0, \theta \rightarrow 0, C \rightarrow 0 \text{ as } y \rightarrow \infty. \end{array} \right\} \end{array} \right\} \quad (15)$$

It is now important to calculate the physical quantities of primary interest, which are the local wall shear stress, the local surface heat and mass flux. Given the velocity field in the boundary layer, we can now calculate the local wall shear stress (i.e., skin-friction) is given by and in dimensionless form, we obtain Knowing the temperature field, it is interesting to study the effect of the free convection and radiation on the rate of heat transfer. This is given by which is written in dimensionless form as

$$\tau = \frac{\tau_w}{\rho u_w^2}, \tau_w = \left[ \mu \frac{\partial u}{\partial y} \right]_{y'=0} = \rho v_0^2 u'(0) = \left[ \frac{\partial u}{\partial y} \right]_{y=0} \quad (16)$$

The dimensionless local surface heat flux (i.e., Nusselt number) is obtained as

$$Nu = \frac{N_u(x')}{Re_x} = - \left[ \frac{\partial \theta}{\partial y} \right]_{y=0} \quad (17)$$

The definition of the local mass flux and the local Sherwood number are respectively given by with the help of these equations, one can write

$$Sh = \frac{S_h(x')}{Re_x} = - \left[ \frac{\partial C}{\partial y} \right]_{y=0} \quad (18)$$

Where  $Re_x = -\frac{v_0 x'}{v}$  is the Reynold's number.

### 3. METHOD OF SOLUTION

The set of differential Equations (12) to (14) subject to the boundary conditions (9) are highly nonlinear, coupled and therefore it cannot be solved analytically. Hence, following Reddy and Bathe [18] the finite element method is used to obtain an accurate and efficient solution to the boundary value problem under consideration. The fundamental steps comprising the method are as follows:

**Step 1: Discretization of the domain into elements:**

The whole domain is divided into finite number of sub-domains, a process known as discretization of the domain. Each sub-domain is termed a finite element. The collection of elements is designated the finite element mesh.

**Step 2: Derivation of the element equations:**

The derivation of finite element equations i.e., algebraic equations among the unknown parameters of the finite element approximation, involves the following three steps:

- a:** Construct the variational formulation of the differential equation.
- b:** Assume the form of the approximate solution over a typical finite element.
- c:** Derive the finite element equations by substituting the approximate solution into variational formulation.

**Step 3: Assembly of element equations:**

The algebraic equations so obtained are assembled by imposing the inter-element continuity conditions. This yields a large number of algebraic equations, constituting the global finite element model, which governs the whole flow domain.

**Step 4: Impositions of boundary conditions:**

The physical boundary conditions defined in equation are imposed on the assembled equations.

**Step 5: Solution of the assembled equations:**

The solutions of above system of equations are obtained by using Thomas algorithm for velocity, temperature and concentration. Also, numerical solutions for these equations are obtained by C-programme. In order to prove the convergence and stability of finite element method, the same C-programme was run with smaller values of  $h$  and  $k$  and no significant change was observed in the values of  $u$ ,  $\theta$  and  $C$ . This process is repeated until the desired accuracy of 0.0005 is obtained. Hence the Galerkin finite element method is stable and convergent.

#### 4. RESULTS AND DISCUSSIONS

In the preceding sections, the problem of chemical reaction effects on an unsteady magnetohydrodynamic free convection flow past an infinite vertical porous plate with constant suction was formulated and the dimensionless governing equations were solved by means of a finite element method. In the present study we adopted the following default parameter values of finite element computations:

$$Gr = 0.1, Gc = 0.1, Pr = 0.71 \text{ (Air)}, Sc = 0.22, Gc = 0.1 \text{ (Hydrogen)}$$

$$M = 0.1, K = 0.1, A = 0.1, \varepsilon = 0.001, \omega t = \frac{\pi}{4}, k_r = 0.1 \text{ and } t = 1.0.$$

All graphs therefore correspond to these values unless specifically indicated on the appropriate graph.

The influence of thermal Grashof number ( $Gr$ ) on the velocity is shown in figure (1). The thermal Grashof number signifies the relative effect of the thermal buoyancy force to the viscous hydrodynamic force. The flow is accelerated due to the enhancement in buoyancy force corresponding to an increase in the thermal Grashof number. The positive values of  $Gr$  correspond to cooling of the plate by natural convection. Heat is therefore conducted away from the vertical plate into the fluid which increases the temperature and thereby enhances the buoyancy force. In addition, it is seen that the peak values of the velocity increases rapidly near the plate as thermal Grashof number increases and then decays smoothly to the free stream velocity. Figure (2) presents typical velocity profiles in the boundary layer for various values of the solutal Grashof number ( $Gc$ ). The solutal Grashof number defines the ratio of the species buoyancy force to the viscous hydrodynamic force. It is noticed that the velocity increases with increasing values of the solutal Grashof number.

Figures (3) and (4) show the behavior of velocity and temperature profiles for different values Prandtl number. The numerical results show that the effect of increasing values of Prandtl number results in a decreasing velocity. It is observed that an increase in the Prandtl number results a decrease of the thermal boundary layer thickness and in general lower average temperature within the boundary layer.




The reason is that smaller values of  $Pr$  are equivalent to increase in the thermal conductivity of the fluid and therefore, heat is able to diffuse away from the heated surface more rapidly for higher values of  $Pr$ . Hence in the case of smaller Prandtl number as the thermal boundary layer is thicker and the rate of heat transfer is reduced. The effect of Schmidt number  $Sc$  on the velocity and concentration are shown in figures (5) and (6). As the Schmidt number increases, the velocity and concentration decreases. This causes the concentration buoyancy effects to decrease yielding a reduction in the fluid velocity. Reductions in the velocity and concentration distributions are accompanied by simultaneous reductions in the velocity and concentration boundary layers.

The effect of Hartmann number ( $M$ ) on the velocity is shown in figure (7). The velocity decreases with an increase in the Hartmann number. It is because that the application of transverse magnetic field will result a resistive type force (Lorentz force) similar to drag force which tends to resist the fluid flow and thus reducing its velocity. Also, the boundary layer thickness decreases with an increase in the Hartmann number. Figure (8) shows the effect of the permeability of the porous medium parameter ( $K$ ) on the velocity distribution. As shown, the velocity is increasing with the increasing dimensionless porous medium parameter. Physically, this result can be achieved when the holes of the porous medium may be neglected.

Figures (9) and (10), illustrate the behavior velocity and concentration for different values of chemical reaction parameter ( $k_r$ ). It is observed that an increase in leads to a decrease in both the values of velocity and concentration. A distinct velocity escalation occurs near the wall after which profiles decay smoothly to the stationary value in free stream. Chemical reaction therefore boosts momentum transfer, i.e., accelerates the flow.

The profiles for skin-friction ( $\tau$ ) due to velocity under the effects of Grashof number, Modified Grashof number, Prandtl number, Schmidt number, Hartmann number, Permeability parameter and Chemical reaction parameter are presented in the table 1 respectively. We observe from this table 1, the skin-friction increases under the effects of Grashof number, Modified Grashof number and Permeability parameter. And decreases under the effects of Prandtl number, Schmidt number, Hartmann number and Chemical reaction parameter. The profiles for Nusselt number ( $Nu$ ) due to temperature profile under the effect of Prandtl number is presented in the table 2. From this table we observe that, the Nusselt number due to temperature profiles decreases under the effect of Prandtl number. The profiles for Sherwood number ( $Sh$ ) due to concentration profiles under the effect of Schmidt number and Chemical reaction parameter are presented in the table 2. We see from this table the Sherwood number due to concentration profiles decreases under the effects of Schmidt number and Chemical reaction parameter.

In order to ascertain the accuracy of the numerical results, the present results are compared with the previous results of Seethamahalakshmi et al. [22] for  $Gr = Gc = 1.0$ ,  $Pr = 0.71$ ,  $Sc = 0.22$ ,  $M = 1.0$  and  $K = 1.0$  in table 3. They are found to be in an excellent agreement.

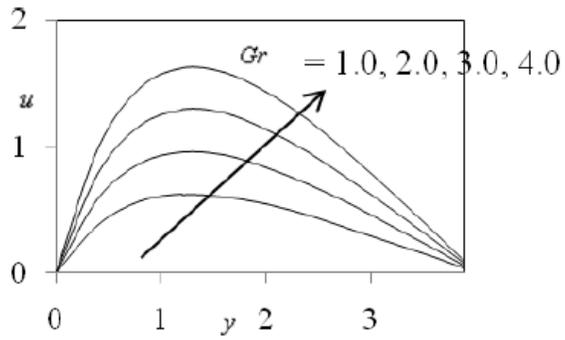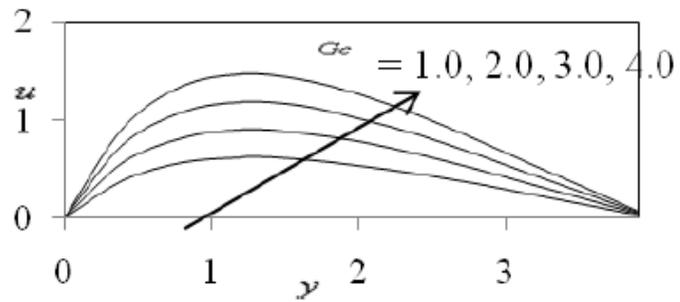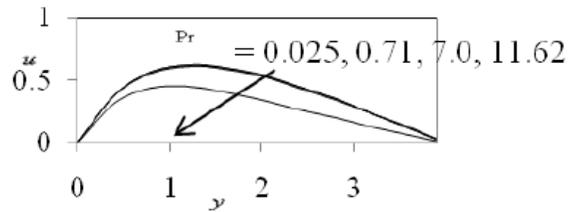FIGURE 1. Velocity profiles for different values of  $Gr$ FIGURE 2. Velocity profiles for different values of  $Gc$ FIGURE 3. Velocity profiles for different values of  $Pr$

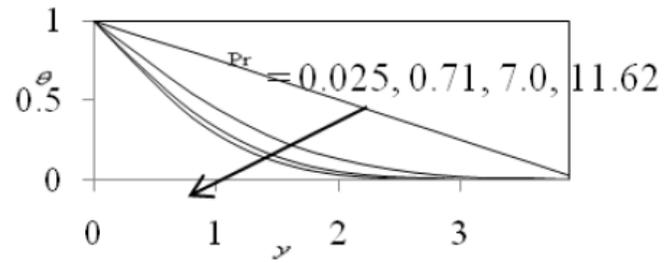


FIGURE 4. Temperature profiles for different values of Pr

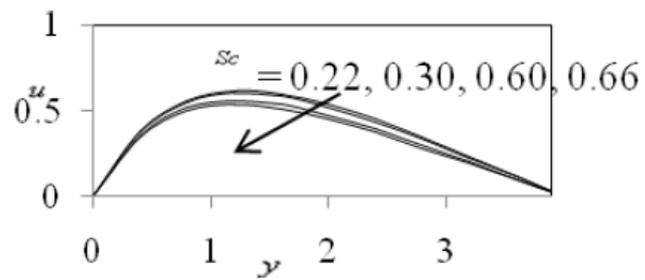


FIGURE 5. Velocity profiles for different values of Sc

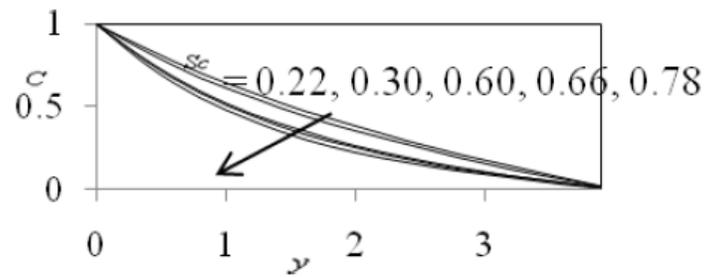
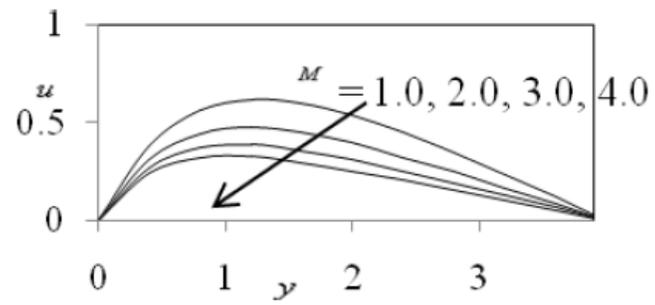
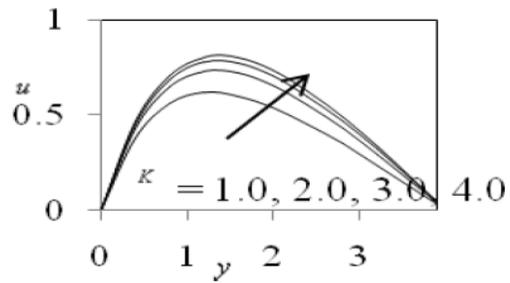
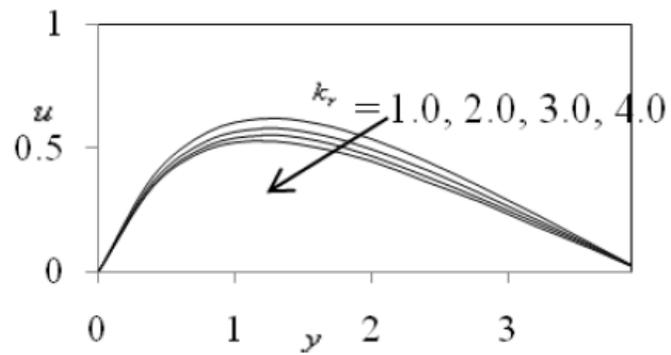


FIGURE 6. Concentration profiles for different values of Sc

FIGURE 7. Velocity profiles for different values of  $M$ FIGURE 8. Velocity profiles for different values of  $K$ FIGURE 9. Velocity profiles for different values of  $k_r$

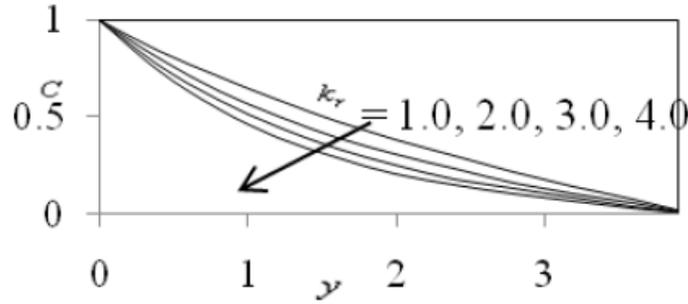


FIGURE 10. Concentration profiles for different values of  $k_r$

TABLE 1. Skin-friction ( $\tau$ ) for the values of Gr, Gc, Pr, Sc, M, K and  $k_r$

Gr	Gc	Pr	Sc	M	K	$k_r$	$\tau$
1.0	1.0	0.71	0.22	1.0	1.0	1.0	5.8411
2.0	1.0	0.71	0.22	1.0	1.0	1.0	8.9829
1.0	2.0	7.00	0.22	1.0	1.0	1.0	8.5404
1.0	1.0	0.71	0.22	1.0	1.0	1.0	4.4432
1.0	1.0	0.71	0.30	1.0	1.0	1.0	5.7113
1.0	1.0	0.71	0.22	2.0	1.0	1.0	4.5870
1.0	1.0	0.71	0.22	1.0	2.0	1.0	6.8033
1.0	1.0	0.71	0.22	1.0	1.0	2.0	5.5172

TABLE 2. Nu values for different values of Pr and Sh values for different values of Sc and  $k_r$

Pr	Nu	Sc	$k_r$	Sh
0.71	7.7337	0.22	1.0	6.7401
7.00	4.9322	0.30	1.0	6.4490
		0.22	2.0	6.0074

TABLE 3. Comparison of present Skin-friction results ( $\tau$ ) with the Skin-friction results ( $\tau^*$ ) obtained by Seethamahalakshmi et al. [22] for different values of Gr, Gc, Pr, Sc, M and K

Gr	Gc	Pr	Sc	M	K	$\tau$	$\tau^*$
1.0	1.0	0.71	0.22	1.0	1.0	4.5517	4.5508
2.0	1.0	0.71	0.22	1.0	1.0	6.2941	6.2931
1.0	2.0	0.71	0.22	1.0	1.0	6.5403	6.5397
1.0	1.0	7.00	0.22	1.0	1.0	3.9954	3.9922
1.0	1.0	0.71	0.30	1.0	1.0	4.2225	4.2216
1.0	1.0	0.71	0.22	2.0	1.0	3.8467	3.8449
1.0	1.0	0.71	0.22	1.0	2.0	4.9277	4.9260

## 5. CONCLUSIONS

In this paper, the chemical reaction effects on an unsteady MHD free convection flow past an infinite vertical porous plate with variable suction was considered. The non-dimensional governing equations are solved with the help of finite element method. The conclusions of the study are as follows:

- (1) The velocity increases with the increase in thermal Grashof number, solutal Grashof number and Permeability parameter.
- (2) The velocity decreases with an increase in the Hartmann number.
- (3) An increase in the Prandtl number decreases the velocity and temperature.
- (4) The velocity as well as concentration decreases with an increase in the Schmidt number.
- (5) The velocity as well as concentration decreases with an increase in the chemical reaction parameter.
- (6) The skin-friction increases with the increase in thermal Grashof number, solutal Grashof number and Permeability parameter.
- (7) The skin-friction decreases with an increase in the Hartmann number, Prandtl number, Schmidt number and Chemical reaction parameter.
- (8) An increase in the Prandtl number decreases the Nusselt number.
- (9) The Sherwood number decreases with an increase in the Schmidt number and Chemical reaction parameter.
- (10) On comparing the skin-friction ( $\tau$ ) results with the skin-friction  $\tau^*$  results of Seethamahalakshmi et al. [22] it can be seen that they agree very well.

## REFERENCES

- [1] C. R. A. Abreu, M. F. Alfradique and A. Silva Telles, Boundary layer flows with Dufour and Soret effects: I: Forced and natural convection, *Chemical Engineering Science*, 61 (13) (2006), 4282-4289.
- [2] A. A. Afify, Similarity solution in MHD: Effects of thermal diffusion and diffusion thermo on free convective heat and mass transfer over a stretching surface considering suction or injection, *Communications in Nonlinear Science and Numerical Simulation*, 14 (5) (2009) 2202-2214.
- [3] K. J. Bathe, *Finite Element Procedures* (Prentice-Hall, New Jersey) 1996.
- [4] O. A. Beg, R. Bhargava, S. Rawat, H. S. Takhar and T. A. Beg, A study of buoyancy driven dissipative micropolar free convection heat and mass transfer in a Darcian porous medium with chemical reaction, *Nonlinear Analysis: Modeling and Control J.*, 12 (2) (2007), 157-180.
- [5] O. A. Beg, J. Zueco and H. S. Takhar, Unsteady magnetohydrodynamic Hartmann Couette flow and heat transfer in a Darcian channel with Hall current, ion slip, viscous and Joule heating effects: network numerical solutions, *Communications Nonlinear Science Numerical Simulation*, 14 (4) (2009), 1082-1097.
- [6] R. C. Chaudhary, M. C. Goyal and A. Jain, Free convection effects on MHD flow past an infinite vertical accelerated plate embedded in porous media with constant heat flux, *Matematicas Ensenanza Universitaria*, 17 (2) (2009), 73-82.
- [7] K. E. Chin, R. Nazar, N. M. Arifin and I. Pop, Effect of variable viscosity on mixed convection boundary layer flow over a vertical surface embedded in a porous medium, *International Communications in Heat and Mass Transfer*, 34 (4) (2007), 464-473.
- [8] S. S. Das and M. Mitra, Unsteady mixed convective MHD flow and mass transfer past an accelerated infinite vertical plate with suction, *Ind. J. Sci. Tech.*, 2 (5) (2009), 18-22.
- [9] S. S. Das, A. Satapathy, J. K. Das and J. P. Panda, Mass transfer effects on MHD flow and heat transfer past a vertical porous plate through a porous medium under oscillatory suction and heat source, *Int. J. Heat Mass Transfer*, 52 (2009), 5962-5969.

- [10] S. S. Das, A. Satapathy, J. K. Das and S. K. Sahoo, Numerical solution of unsteady free convective MHD flow past an accelerated vertical plate with suction and heat flux, *J. Ultra Sci. Phys. Sci.*, 19 (1) (2007), 105-112.
- [11] S. S. Das, S. K. Sahoo and G. C. Dash, Numerical solution of mass transfer effects on an unsteady flow past an accelerated vertical porous plate with suction, *Bull. Malays. Math. Sci. Soc.*, 29 (1) (2006), 33-42.
- [12] J. Gireesh Kumar, P. V. Satyanarayana and S. Ramakrishna, Effects of chemical reaction and mass transfer on MHD unsteady free convection flow past an infinite vertical plate with constant suction and heat sink, *J. Ultra Scientist*, 21 (3) (2009), 12-28.
- [13] T. Hayat, M. Mustafa and I. Pop, Heat and mass transfer for Soret and Dufour effects on mixed convection boundary layer flow over a stretching vertical surface in a porous medium filled with a visco elastic fluid, *Communications in Nonlinear Science and Numerical Simulation*, 15 (5) (2010), 1183-1196
- [14] F. S. Ibrahim, A. M. Elaiw and A. A. Bakr, Effect of the chemical reaction and radiation absorption on the unsteady MHD free convection flow past a semi infinite vertical permeable moving plate with heat source and suction, *Communications Nonlinear Science Numerical Simulation*, 13 (6) (2008), 1056-1066.
- [15] Y. J. Kim, Unsteady MHD convective heat transfer past a semi infinite vertical porous moving plate with variable suction, *Int. J. Engg. Sci.*, 38 (2008), 833-845.
- [16] P. M. Patil and P. S. Kulkarni, Effects of chemical reaction on free convection flow of a polar fluid through a porous medium in the presence of internal heat generation, *International Journal of Thermal Sciences*, 47 (2008), 1043-1053.
- [17] M. M. Rahman and M. A. Sattar, MHD convective flow of a micropolar fluid past a continuously moving vertical porous plate in the presence of heat generation/absorption, *J. Heat Transfer*, 17 (2006), 85-90.
- [18] J. N. Reddy, *An Introduction to the Finite Element Method* (McGraw-Hill, New York) 1985.
- [19] K. C. Sarangi and C. B. Jose, Unsteady free convective MHD flow and mass transfer past a vertical porous plate with variable temperature, *Bull. Cal. Math. Soc.*, 97 (2) (2005), 137-146.
- [20] M. A. Seddeek and F. A. Salama, The effect of temperature dependent viscosity and thermal conductivity on unsteady MHD convective heat transfer past a semi infinite vertical porous plate, *J. computational Materials Sci.*, 40 (2007), 186-192.
- [21] M. A. Seddeek, A. A. Darwish and M. S. Abdelmeguid, Effects of chemical reaction and variable viscosity on hydromagnetic mixed convection heat and mass transfer for Hiemenz flow through porous media with radiation, *Communications in Nonlinear Science and Numerical Simulation*, 12 (2) (2007), 195-213.
- [22] Seethamahalakshmi, B. D. C. N. Prasad and G. V. Ramana Reddy, MHD free convective mass transfer flow past an infinite vertical porous plate with variable suction and Soret effect, *Asian Journal of Current Engineering and Maths*, 1 (2) (2012), 49-55.
- [23] K. Srihari, J. Anand Rao and N. Kishan, MHD free convection flow of an incompressible viscous dissipative fluid in an infinite vertical oscillating plate with constant heat flux, *Journal of Energy, Heat and Mass Transfer*, 28 (2006), 19-28.
- [24] S. Sivaiah and R. Srinivasa Raju, Finite element solution of heat and mass transfer flow with Hall current, heat source, and viscous dissipation, *Appl. Math. Mech.- Engl. Ed.*, 34 (5) (2013), 559-570, DOI 10.1007/s10483-013-1690-8

MURALI G

DEPARTMENT OF APPLIED SCIENCE, PUNE INSTITUTE OF COMPUTER TECHNOLOGY, INDIA.

*E-mail address:* muraligundagani@yahoo.in

AJIT PAUL

DEPARTMENT OF APPLIED SCIENCE, SHIATS UNIVERSITY, ALLAHABAD, INDIA.

*E-mail address:* paulajit1969@yahoo.co.in

N.V.N BABU

DEPARTMENT OF APPLIED SCIENCE, SHIATS UNIVERSITY, ALLAHABAD, INDIA.

*E-mail address:* nvn45@gmail.com